

LC 35L

LiFePO₄ Battery | 12.8V | 35Ah | 448Wh



Electrical Specifications

Nominal Voltage	12.8V
Nominal Capacity	35Ah
Capacity Tolerance	± 4%
Capacity @ 25 A	84min
Energy	448Wh
Resistance	≤ 40 mΩ @ 50% SOC
Self Discharge	< 3% / month
Cell Type	IFR26650EC - LiFePO ₄

Discharge Specifications

Max. Continuous Discharge Current	35A
Peak Discharge Current	50A (5 to 10s)
BMS Discharge Cut-Off Current	200A ± 25A (12 to 32ms)
Recommended Low Voltage Disconnect	11V
BMS Discharge Cut-Off Voltage	> 9.2V (50 to 150ms)
Reconnect Voltage	> 10V (2.5V / Zelle)
Short Circuit Protection	200 to 800μs

Charge Specifications

Recommended Charge Current	7A
Maximum Charge Current	35A
Recommended Charge Voltage	14.6V
BMS Charge Cut-Off Voltage	< 15.4V (3.85V/Zelle)
Reconnect Voltage	> 14.6V (3.65V/Zelle)
Float Charge Voltage	< 14.4V (3.6V/Zelle)
Maximum Batteries in Series	4


Mechanical Specifications

Measurements (L × W × H)	195 × 131 × 171 mm
Approx. Weight	4.8 kg
Terminal Type	M8
Terminal Torque	9 to 11 N m
Case Material	ABS
Enclosure Protection	IP65

Temperature Specifications

Discharge Temperature	-20 to 60°C
Charge Temperature	0 to 45°C
Storage Temperature	-5 to 35°C
BMS High Temperature Cut-Off	75°C
Reconnect Temperature	53°C


Measurements

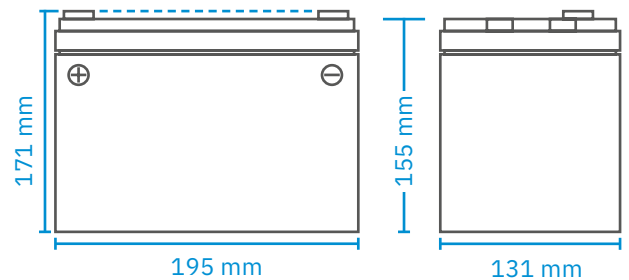


Compliance

Certifications	CE (Battery) UN38.3 (Battery) RoHS
Shipping Classification	UN 3480, CLASS 9


**Cycle Life vs. Depth of Discharge (DOD)
Discharge 0.5C / Charge 0.5C (25°C)**

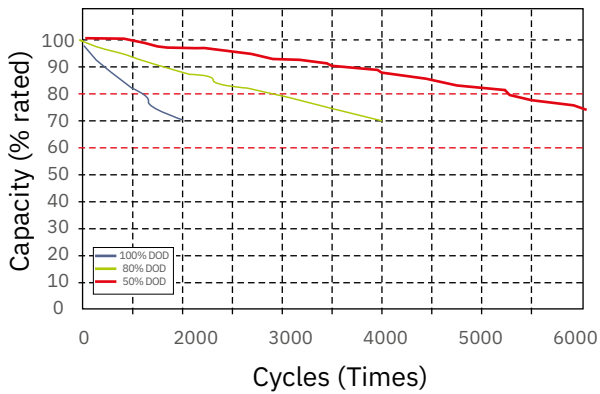


**Discharge Voltage Profiles at 0.5C Discharge Rate
(Various Ambient Temperatures)**

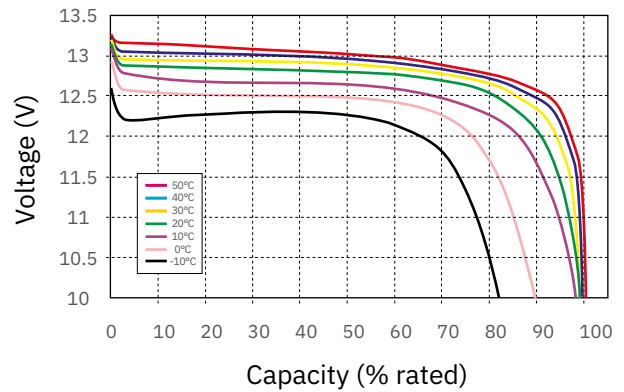


Discharge Voltage Profiles at Various Rates (25°C Ambient Temperature)

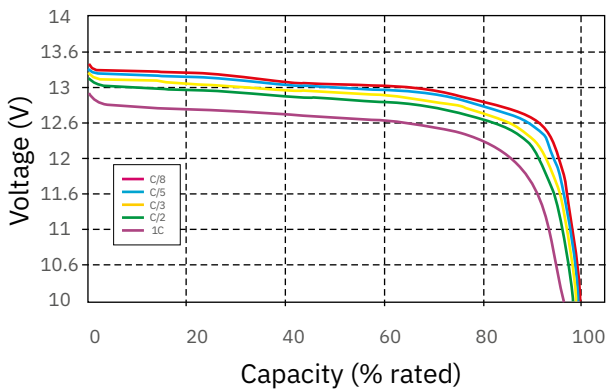

**Typical Voltage and SOC Profiles at 0.5C Charging
(25°C Ambient Temperature)**

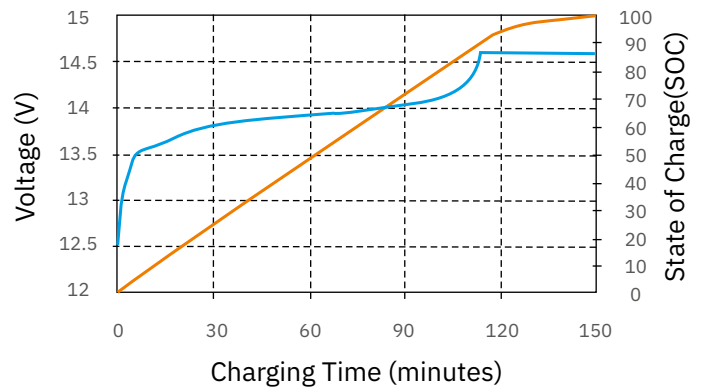

**Charging Characteristics
(0.5C at 20°C)**

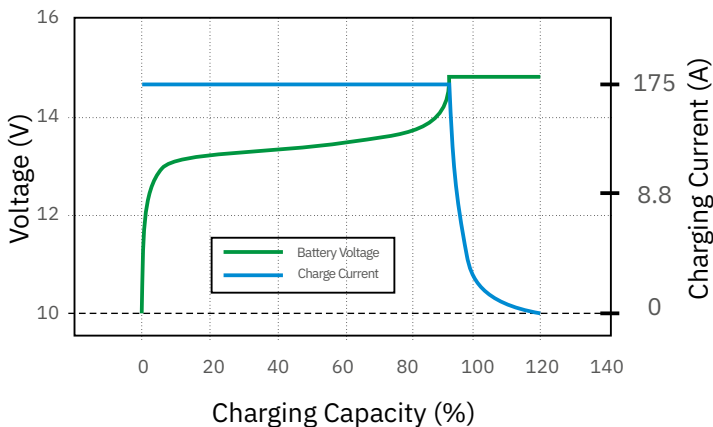

**Constant Power Discharge Characteristics
(25°C Ambient Temperature)**

